

K-EYE K20 HCR

I DIAGRAMMI FOTOMETRICI

D FOTOMETRICHE DIAGRAMME

GB PHOTOMETRIC DIAGRAMS

E DIAGRAMAS FOTOMÉTRICOS

F DIAGRAMMES PHOTOMETRIQUES

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.

Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.


Minimum Zoom (7° 10% - 4.4° 50%)

Total Output: 3850 lumens (ALL COLORS)

Total Output: 1900 lumens (CTO 100%)

Total Output: 3200 lumens (CTO 0%)

Red	lux (fc)	0	4592 (427)	1653 (154)	413 (38.4)	184 (17.1)
Amber	lux (fc)	0	19197 (1783)	6911 (642)	1728 (161)	768 (71.3)
Lime	lux (fc)	0	39044 (3627)	14056 (1306)	3514 (326)	1562 (145)
Green	lux (fc)	0	11719 (1089)	4219 (392)	1055 (98)	469 (43.5)
Cyan	lux (fc)	0	5761 (535)	2074 (193)	519 (48.2)	230 (21.4)
Blue	lux (fc)	0	1794 (167)	646 (60)	162 (15)	72 (6.67)
All colors	lux (fc)	0	76553 (7112)	27559 (2560)	6890 (640)	3062 (284)
CTO 100%	lux (fc)	0	37817 (3513)	13614 (1265)	3404 (316)	1513 (141)
CTO 0%	lux (fc)	0	63575 (5906)	22887 (2126)	5722 (532)	2543 (236)

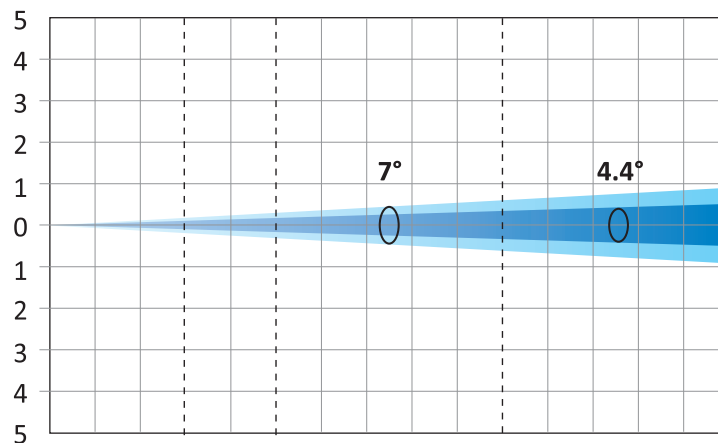

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	0.37 (1' 2")	0.61 (2' 0")	1.22 (4' 0")	1.83 (6' 0")
Diameter 50%	m (ft in)	0	0.23 (0' 9")	0.38 (1' 3")	0.77 (2' 6")	1.15 (3' 9")

K-EYE K20 HCR

I DIAGRAMMI FOTOMETRICI

D FOTOMETRISCHE DIAGRAMME

GB PHOTOMETRIC DIAGRAMS

E DIAGRAMAS FOTOMÉTRICOS

F DIAGRAMMES PHOTOMETRIQUES


Maximum Zoom (53.2° 10% - 35.6° 50%)

Total Output: 9260 lumens (ALL COLORS)

Total Output: 4680 lumens (CTO 100%)

Total Output: 7540 lumens (CTO 0%)

Red	lux (fc)	0	162 (15)	58 (5.42)	15 (1.35)	6 (0.6)
Amber	lux (fc)	0	674 (62.6)	243 (22.5)	61 (5.64)	27 (2.5)
Lime	lux (fc)	0	1332 (124)	480 (44.5)	120 (11.1)	53 (4.95)
Green	lux (fc)	0	392 (36.4)	141 (13.1)	35 (3.28)	16 (1.46)
Cyan	lux (fc)	0	194 (18)	70 (6.49)	17 (1.62)	8 (0.72)
Blue	lux (fc)	0	68 (6.32)	24 (2.27)	6 (0.57)	3 (0.25)
All colors	lux (fc)	0	2635 (245)	949 (88.1)	237 (22)	105 (9.79)
CTO 100%	lux (fc)	0	1367 (127)	492 (45.7)	123 (11.4)	55 (5.08)
CTO 0%	lux (fc)	0	2146 (199)	773 (71.8)	193 (17.9)	86 (7.97)

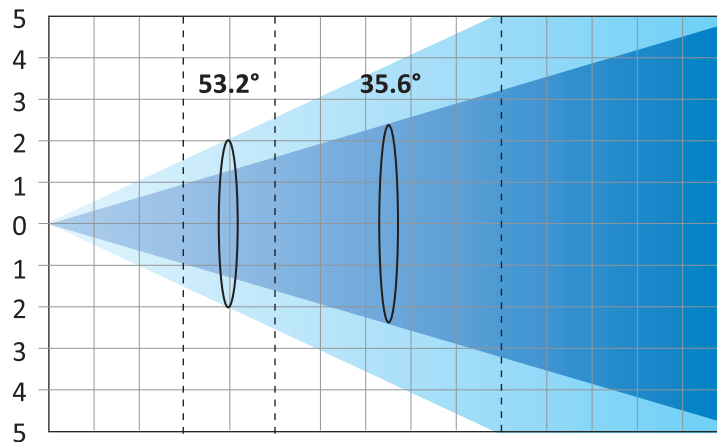

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	3.00 (9' 10")	5.01 (16' 5")	10.02 (32' 10")	15.02 (49' 3")
Diameter 50%	m (ft in)	0	1.93 (6' 4")	3.21 (10' 6")	6.42 (21' 1")	9.63 (31' 7")

K-EYE K20 HCR

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMAS FOTOMÉTRICOS

