


K-EYE S10 HCR

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMAS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.
Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.
Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.
Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw.50% maximaler Ausleuchtung.
Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

Minimum Zoom (6.7° 10% - 4.7° 50%)
Total Output: 2020 lumens (ALL COLORS)
Total Output: 1020 lumens (CTO 100%)
Total Output: 1830 lumens (CTO 0%)

Red	lux (fc)	0	2119 (197)	763 (70.9)	191 (17.7)	85 (7.88)
Amber	lux (fc)	0	9792 (910)	3525 (327)	881 (81.9)	392 (36.4)
Lime	lux (fc)	0	19719 (1832)	7099 (659)	1775 (165)	789 (73.3)
Green	lux (fc)	0	5967 (554)	2148 (200)	537 (49.9)	239 (22.2)
Cyan	lux (fc)	0	2836 (263)	1021 (94.9)	255 (23.7)	113 (10.5)
Blue	lux (fc)	0	983 (91.4)	354 (32.9)	89 (8.22)	39 (3.65)
All colors	lux (fc)	0	38353 (3563)	13807 (1283)	3452 (321)	1534 (143)
CTO 100%	lux (fc)	0	19186 (1782)	6907 (642)	1727 (160)	767 (71.3)
CTO 0%	lux (fc)	0	34378 (3194)	12376 (1150)	3094 (287)	1375 (128)

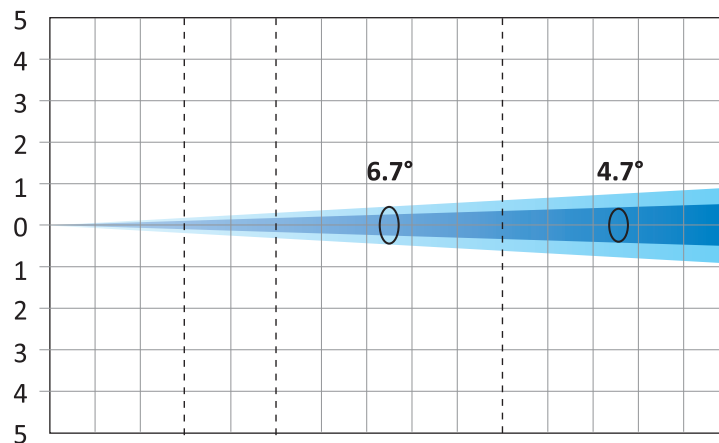

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	0.35 (1' 2")	0.59 (1' 11")	1.17 (3' 10")	1.76 (5' 9")
Diameter 50%	m (ft in)	0	0.25 (0' 10")	0.41 (1' 4")	0.82 (2' 8")	1.23 (4' 0")

K-EYE S10 HCR

I DIAGRAMMI FOTOMETRICI

D FOTOMETRICHE DIAGRAMME

GB PHOTOMETRIC DIAGRAMS

E DIAGRAMAS FOTOMÉTRICOS

F DIAGRAMMES PHOTOMETRIQUES


Maximum Zoom (51° 10% - 35.4° 50%)

Total Output: 4230 lumens (ALL COLORS)

Total Output: 2080 lumens (CTO 100%)

Total Output: 3760 lumens (CTO 0%)

Red	lux (fc)	0	74 (6.87)	27 (2.47)	7 (0.62)	3 (0.27)
Amber	lux (fc)	0	320 (29.7)	115 (10.7)	29 (2.68)	13 (1.19)
Lime	lux (fc)	0	643 (59.7)	231 (21.5)	58 (5.38)	26 (2.39)
Green	lux (fc)	0	190 (17.7)	68 (6.35)	17 (1.59)	8 (0.71)
Cyan	lux (fc)	0	90 (8.36)	32 (3.01)	8 (0.75)	4 (0.33)
Blue	lux (fc)	0	35 (3.25)	13 (1.17)	3 (0.29)	1 (0.13)
All colors	lux (fc)	0	1252 (116)	451 (41.9)	113 (10.5)	50 (4.65)
CTO 100%	lux (fc)	0	635 (59)	229 (21.2)	57 (5.31)	25 (2.36)
CTO 0%	lux (fc)	0	1121 (104)	404 (37.5)	101 (9.37)	45 (4.17)

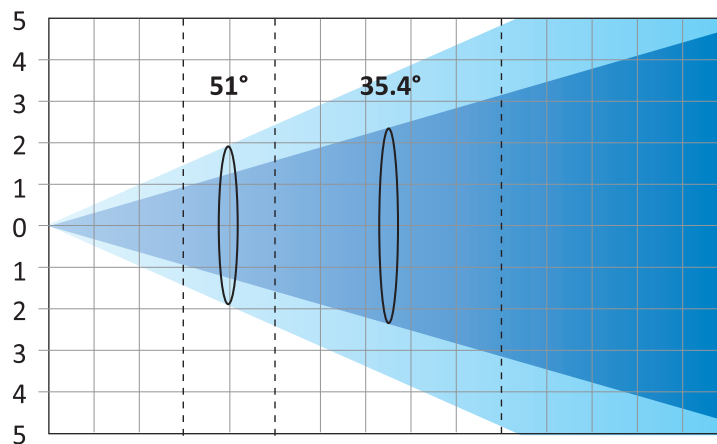

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	2.86 (9' 5")	4.77 (15' 8")	9.54 (31' 4")	14.31 (46' 11")
Diameter 50%	m (ft in)	0	1.91 (6' 3")	3.19 (10' 6")	6.38 (20' 11")	9.57 (31' 5")

K-EYE S10 HCR

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMAS FOTOMÉTRICOS

