

K-EYE S20 HCR

I DIAGRAMMI FOTOMETRICI

D FOTOMETRICHE DIAGRAMME

GB PHOTOMETRIC DIAGRAMS

E DIAGRAMAS FOTOMÉTRICOS

F DIAGRAMMES PHOTOMETRIQUES

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.


Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw.50% maximaler Ausleuchtung.

Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

Minimum Zoom (6.8° 10% - 4.5° 50%)
Total Output: 3250 lumens (ALL COLORS)
Total Output: 1600 lumens (CTO 100%)
Total Output: 2450 lumens (CTO 0%)

Red	lux (fc)	0	4025 (374)	1449 (135)	362 (33.7)	161 (15)
Amber	lux (fc)	0	14325 (1331)	5157 (479)	1289 (120)	573 (53.2)
Lime	lux (fc)	0	30469 (2831)	10969 (1019)	2742 (255)	1219 (113)
Green	lux (fc)	0	10075 (936)	3627 (337)	907 (84.2)	403 (37.4)
Cyan	lux (fc)	0	4069 (378)	1465 (136)	366 (34)	163 (15.1)
Blue	lux (fc)	0	1492 (139)	537 (49.9)	134 (12.5)	60 (5.54)
All colors	lux (fc)	0	62108 (5770)	22359 (2077)	5590 (519)	2484 (231)
CTO 100%	lux (fc)	0	31133 (2892)	11208 (1041)	2802 (260)	1245 (116)
CTO 0%	lux (fc)	0	47594 (4422)	17134 (1592)	4284 (398)	1904 (177)

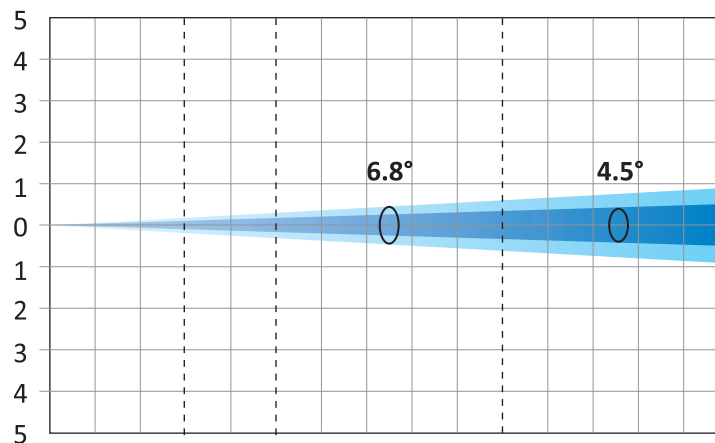

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	0.36 (1' 2")	0.59 (1' 11")	1.19 (3' 11")	1.78 (5' 10")
Diameter 50%	m (ft in)	0	0.24 (0' 9")	0.39 (1' 3")	0.79 (2' 7")	1.18 (3' 10")

K-EYE S20 HCR

I DIAGRAMMI FOTOMETRICI

D FOTOMETRICHE DIAGRAMME

GB PHOTOMETRIC DIAGRAMS

E DIAGRAMAS FOTOMÉTRICOS

F DIAGRAMMES PHOTOMETRIQUES


Maximum Zoom (51.7° 10% - 36.2° 50%)

Total Output: 6850 lumens (ALL COLORS)

Total Output: 3400 lumens (CTO 100%)

Total Output: 5200 lumens (CTO 0%)

Red	lux (fc)	0	130 (12.1)	47 (4.35)	12 (1.09)	5 (0.48)
Amber	lux (fc)	0	467 (43.4)	168 (15.6)	42 (3.9)	19 (1.74)
Lime	lux (fc)	0	962 (89.4)	346 (32.2)	87 (8.04)	38 (3.57)
Green	lux (fc)	0	314 (29.2)	113 (10.5)	28 (2.63)	13 (1.17)
Cyan	lux (fc)	0	124 (11.5)	45 (4.15)	11 (1.04)	5 (0.46)
Blue	lux (fc)	0	54 (5.02)	19 (1.81)	5 (0.45)	2 (0.2)
All colors	lux (fc)	0	1972 (183)	710 (66)	177 (16.5)	79 (7.33)
CTO 100%	lux (fc)	0	1001 (93)	360 (33.5)	90 (8.37)	40 (3.72)
CTO 0%	lux (fc)	0	1508 (140)	543 (50.4)	136 (12.6)	60 (5.6)

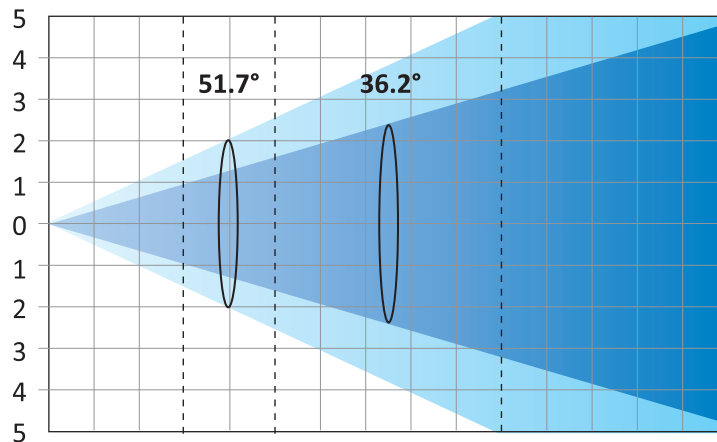

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	2.91 (9' 6")	4.84 (15' 11")	9.69 (31' 9")	14.53 (47' 8")
Diameter 50%	m (ft in)	0	1.96 (6' 5")	3.27 (10' 9")	6.54 (21' 5")	9.81 (32' 2")

K-EYE S20 HCR

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMAS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

